



BASIC IP65 BEL DM/WM

Safety luminaire with protection class IP65 made of polycarbonate with clear light cover for wide area illumination.

For unprotected outdoor installation, we offer an accessory set with pressure compensation valve. In the versions with heating case and external supply unit, the pressure compensation valve is always integrated in the luminaire.


Optional the luminaire is available with an external supply unit to mount the luminaire outside and the supply unit inside.

The luminaire is also available with a heating case incl. battery 4,8V 4,2Ah.




Technical specifications

Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (light cover clear)
Type of assembly	Ceiling mounting and wall mounting
Dimensions (WxHxD)	370 x 140 x 93 mm (luminaire) 254 x 90 x 180 mm (optional supply unit) max. 20,00m connecting cable between luminaire and supply unit. Number of wires: min. 4 x 1,5 mm ²
Protection class	IP65
Safety class	II

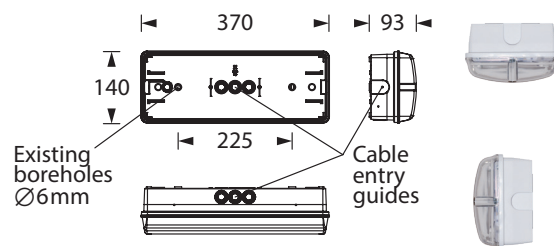

Wide Area Optic

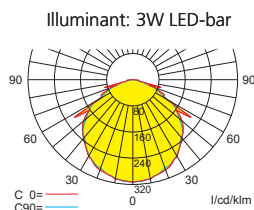

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz
NiMh battery	4,8V 2,0Ah
Luminous flux	100% / 100% emergency / mains

Temperature range BS 0°C to +35°C

Temperature range DS -5°C to +30°C

Order information

Item number	Description	Illuminant	Light current mains operation	Light current emergency	Power consumption	Rated operating time
LE401321-SL	BASIC IP65 BEL DM/WM EB-SL LED	3W LED-bar	350lm	350lm	6VA	1h
LE401321-SWX	BASIC IP65 BEL DM/WM EB-SWX LED	3W LED-bar	350lm	350lm	6,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005