



# BASIC IP65 PD UM

Exit luminaire with protection class IP65 made of polycarbonate with white reflector and opal light cover for double sided pictogram assembly for wall or ceiling mounting.


For unprotected outdoor installation, we offer an accessory set with pressure compensation valve. In the versions with heating case, the pressure compensation valve is always integrated in the luminaire.

Optional the luminaire is available with a heating case with battery (4,8V 0,8Ah).



## Technical specifications

|                        |                                               |
|------------------------|-----------------------------------------------|
| Visibility distance    | 32 m                                          |
| Connecting terminals   | 2 x 2,5 mm <sup>2</sup> for double assignment |
| Casing/colour          | Polycarbonate / white (light cover opal)      |
| Type of assembly       | Universal mounting                            |
| Dimensions (W x H x D) | 370 x 220 x 140 mm                            |
| Protection class       | IP65                                          |
| Safety class           | II                                            |

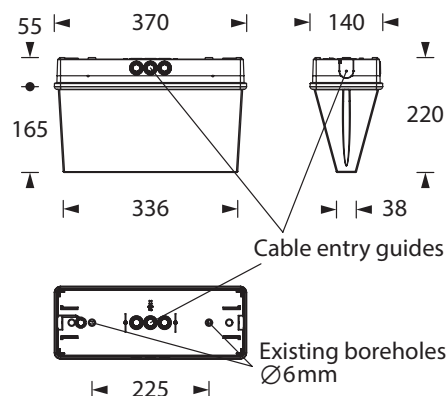

## Self contained luminaires

### Technical specifications

|                |              |
|----------------|--------------|
| Voltage supply | 230V 50/60Hz |
| NiMH battery   | 4,8V 0,8Ah   |

|                      |               |
|----------------------|---------------|
| Temperature range BS | 0°C to +35°C  |
| Temperature range DS | -5°C to +30°C |

|               |                                |
|---------------|--------------------------------|
| Luminous flux | 15%-50% / 100% emergency/mains |
|---------------|--------------------------------|

### Order information

| Standard version |                             | Illuminant   | Light current<br>mains operation | Power<br>consumption | Rated<br>operating time |
|------------------|-----------------------------|--------------|----------------------------------|----------------------|-------------------------|
| Item number      | Description                 |              |                                  |                      |                         |
| LE401117-SL      | BASIC IP65 PD UM EB-SL LED  | 1,5W LED-bar | 190lm                            | 5VA                  | 1h                      |
| LE401117-SWX     | BASIC IP65 PD UM EB-SWX LED | 1,5W LED-bar | 190lm                            | 5,5VA                | 1h                      |

## Self contained luminaires

|    |                             |
|----|-----------------------------|
| SC | Self monitoring SELF CHECK  |
| SL | Bus control SAFELOG Line    |
| SW | Wireless monitoring SAFELOG |

## General

|   |                    |
|---|--------------------|
| F | Wide area optic    |
| R | Escape route optic |
| T | Downlight optic    |

## Our standard casing colours

|       |          |
|-------|----------|
| White | RAL 9016 |
| Black | RAL 9005 |