



BASIC IP65

Exit luminaire with protection class IP65 made of polycarbonate with white reflector and clear light cover for single sided pictogram assembly for wall mounting.


For unprotected outdoor installation, we offer an accessory set with pressure compensation valve. In the versions with heating case, the pressure compensation valve is always integrated in the luminaire.

Optional the luminaire is available with a heating case with battery (4,8V 0,8Ah).



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonat / white (light cover clear)
Type of assembly	Wall mounting
Dimensions (W x H x D)	370 x 140 x 93 mm
Protection class Safety class	IP65 II

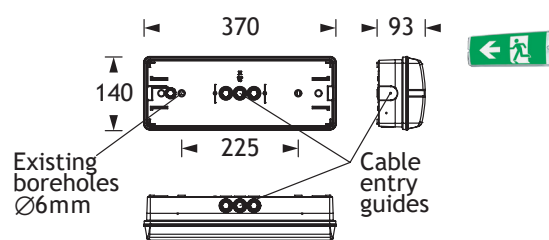

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz
NiMH battery	4,8V 0,8Ah

Temperature range BS	0°C to +35°C
Temperature range DS	-5°C to +30°C

Luminous flux	15%-50% / 100% emergency/mains
---------------	--------------------------------

Order information

Standard version

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE401203-SL	BASIC IP65 WM EB-SL LED	1,5W LED-bar	190lm	5VA	1h
LE401203-SWX	BASIC IP65 WM EB-SWX LED	1,5W LED-bar	190lm	5,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005