



BIG BOX 600 DM/WM

The product is not in line with DIN 4844-1.

Modern IP43 exit sign luminaire made of anodized aluminum profile.

Available for wall and ceiling mounting including universal pictogram set.



In addition, the luminaire is equipped with light emission windows facing downwards.

The luminaire is equipped with a 2 x 3 Watt LED-bar.



Technical specifications

Visibility distance	62 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Aluminum, anodized
Type of assembly	Ceiling mounting or wall mounting
Dimensions (W x H x D)	650 x 335 x 84 mm
Protection class	IP43
Safety class	I

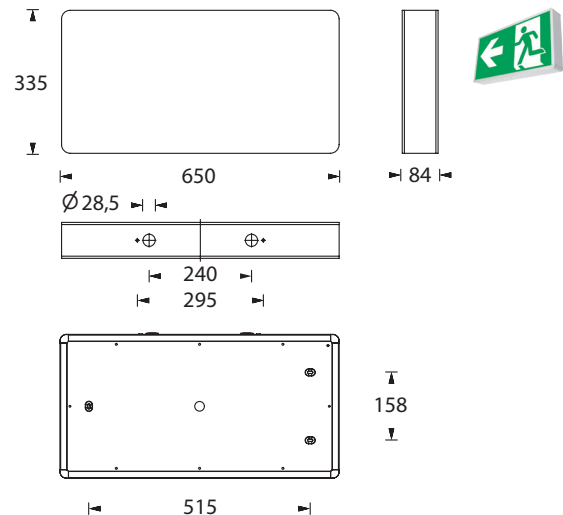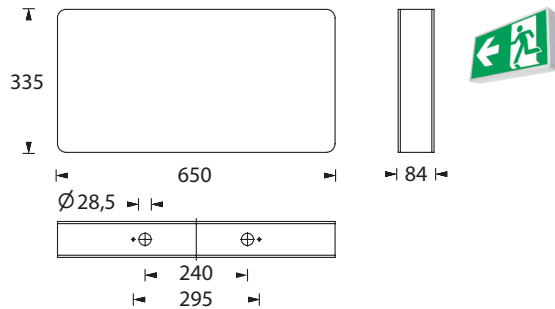

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS	0°C to +35°C	Luminous flux	15%-50% / 100% emergency/mains
NiMH battery	4,8V 0,8Ah	Temperature range DS	-5°C to +30°C		

Order information

Standard version

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE407005-SL	BIG BOX 600 DM/WM EB-SL LED	2x3W LED-bar	580lm	15,5VA	1h
LE407005-SWX	BIG BOX 600 DM/WM EB-SWX LED	2x3W LED-bar	580lm	16VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005