



ILUX DUO 300 DM

Combined exit sign and safety luminaire made of polycarbonate with clear cover, easy mounting due to click system.

Exit sign luminaire with double sided pictogram and additional wide area and escape route illumination for ceiling mounting. Optic for wide area illumination already mounted also enclosed is the optic for escape route.


The luminaire is equipped with a 3 watt LED bar and also a 3 watt power LED.

Even though the luminaire combines two different types of luminaires, it is counted as one single luminaire within an electric circuit.




Technical specifications


Visibility distance	30 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (light cover clear)
Type of assembly	Ceiling mounting
Dimensions (W x H x D)	313 x 187 x 62 mm
Protection class Safety class	IP43 II

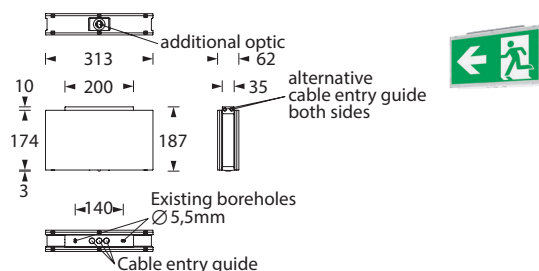

Wide Area Optic



Escape Route Optic



Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux exit sign	15%-50% / 100% emergency / mains
NiMh battery	4,8V 0,8Ah (1h) / 4,8V 2,0Ah (3h)	Temperature range DS -5°C to +30°C	Luminous flux safety module	100% / 0% emergency / mains

Order information

Item number	Description	Illuminant Exit sign	Light current mains operation	Light current emergency	Power consumption	Rated operating time
LE404976-SL	iLUX 300 DUO DM EB-SL LED	3W LED-bar + 3W LED	350lm	190lm	11VA	1h
LE404976-SWX	iLUX 300 DUO DM EB-SWX LED	3W LED-bar + 3W LED	350lm	190lm	11,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005
Graphite grey	RAL 7024