



LEAN 200 UM

Lean polycarbonate casing with a transparent light cover for double sided in-sertable pictograms for universal mounting. Can be used optional as ceiling mounting or wall mounting with pre-cut fixation and cable entry holes from top and back.

No screws for quick and easy mounting.

Optionally: Recessed mounting with recessed ceiling frame.

The luminaire is equipped with 1 watt LED-bar and pictogram foil set.




Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate, white
Type of assembly	Universal mounting (optional: recessed ceiling frame)
Dimensions (W x H x D)	265 x 184 x 37 mm
Protection class	IP43
Safety class	II



optional: Recessed ceiling frame

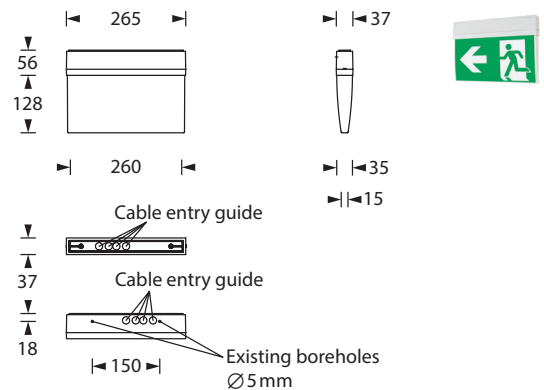

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux	15%-50% / 100% emergency/mains
NiMH battery	4,8V 0,8Ah	Temperature range DS -5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE405612-SL	LEAN 200 UM EB-SL LED	1W LED-bar	130lm	4,5VA	1h
LE405612-SWX	LEAN 200 UM EB-SWX LED	1W LED-bar	130lm	5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005
Graphite grey	RAL 7024