



LINE 200 UM

Extremely lean polycarbonate casing in an appealing design. Easy to handle locking mechanism without screws.

Can be used optional as ceiling mounting or wall mounting with pre-cut fixation and cable entry holes from top and back. Optionally: Recessed mounting with recessed ceiling frame.

The 10 mm light deflecting pane is illuminated with a 1 watt LED-bar and is delivered with a pictogram-set.




Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double
Casing/colour	assignment Polycarbonate, white
Type of assembly	Universal mounting
Dimensions (W x H x D)	265 x 191 x 37 mm
Protection class Safety class	IP43 II



optional: Recessed ceiling frame

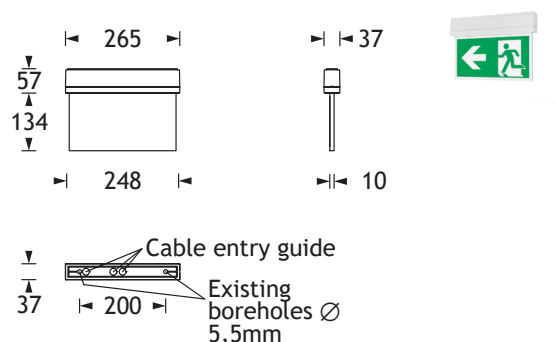

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz
NiMH battery	4,8V 0,8Ah

Temperature range BS 0°C to +35°C
C Temperature range DS -5°C to +30°C

Luminous flux 15%-50% / 100% emergency / mains

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE405107-SL	LINE 200 UM EB-SL LED	1W LED-bar	130lm	4,5VA	1h
LE405107-SWX	LINE 200 UM EB-SWX LED	1W LED-bar	130lm	5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005