



LINE 300 IP65 UM


Lean and screwless combined exit sign and safety luminaire with protection class IP65. The luminaire is made of sturdy polycarbonate and equipped with an IP65 membrane pressure compensation valve. For ceiling and wall mounting. Cable entry from above and back. For wall mounting there is an inconspicuous wall adapter enclosed. Also possible is recessed ceiling mounting with an optional recessed ceiling frame.

Pane illumination with 3 watt LED-bar. Viewing distance 30m, pictogram set is included.



Technical specifications

Visibility distance	30m
Connecting terminals	2 x 2,5mm ² for double assignment
Casing/colour	Polycarbonate / white or black (light cover clear)
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Wall mounting	336 x 228 x 63 mm
Ceiling mounting	336 x 225 x 59 mm
Protection class	IP65
Safety class	II

Symmetrical Optic

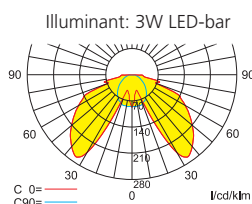

optional: Recessed ceiling frame

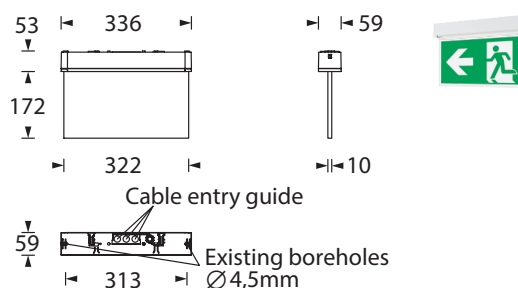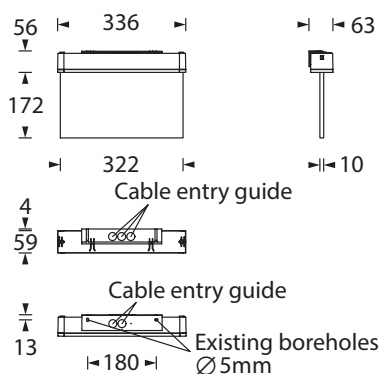

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS	0°C to +35°	Luminous flux	15%-50% / 100% emergency / mains
NiMh battery	4,8V 0,8Ah	C Temperature range DS	-5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE405951-SL	LINE 300 IP65 UM EB-SL LED	3W LED-bar	380lm	6VA	1h
LE405951-SWX	LINE 300 IP65 UM EB-SWX LED	3W LED-bar	380lm	6,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005