



LINE ALU200 RM

Elegant and modern design, made of aluminum in white or black.


The luminaire is suitable for recessed ceiling mounting. With the optional wall bracket the luminaire can also be used for recessed wall mounting in cavity walls. Convenient installation due to circular cutout. Installation box and container are included in the scope of delivery. With the two accessory sets, central pendulum and wire mounting, the luminaire is very changeable and versatile.

The 10 mm light-deflecting pane is illuminated with a 1 watt LED-bar. A pictogram set with arrow left / right / down / blind is already enclosed.



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Aluminum die-cast / white or black
Type of assembly	Recessed ceiling mounting, with wall bracket also recessed wall mounting in cavity walls
Dimensions	
Luminaire (W x H x D)	254 x 164 x 78 mm
Container (W x H x D)	315 x 73 x 30 mm
Protection class	IP40
Safety class	II

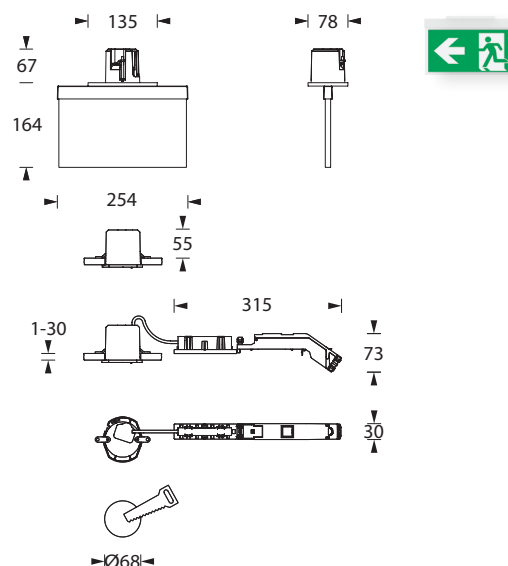

Attention: Minimum installation depth 130mm

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux	15%-50% / 100% emergency / mains
NiMH battery	4,8V 0,8Ah	Temperature range DS -5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE407414-SL	LINE ALU200 RM EB-SL LED	1W LED-bar	130lm	4,5VA	1h
LE407414-SWX	LINE ALU200 RM EB-SWX LED	1W LED-bar	130lm	5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005