



LINE ALU200 UM

Elegant and modern design, made of aluminum in white or black.



By simply remounting the container, the luminaire can be used universally for ceiling and wall mounting. A 90 degree parallel wall mounting is also possible, a corresponding pictogram set is optionally available.

With the two accessory sets, central pendulum and wire mounting, the luminaire is very changeable and versatile.

The 10 mm light-deflecting pane is illuminated with a 1 watt LED-bar. A pictogram set with arrow left / right / down / blind is already enclosed.

Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Aluminum die-cast / white or black
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling	254 x 194 x 83 mm
Wall	254 x 164 x 53 mm
Protection class	IP40
Safety class	II

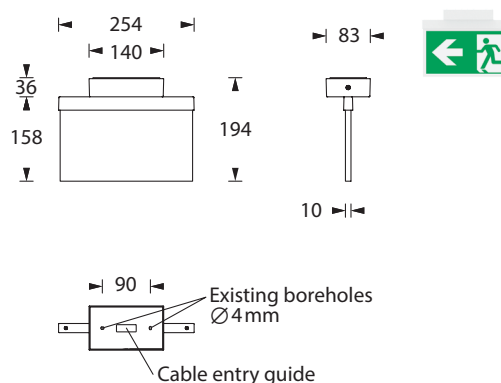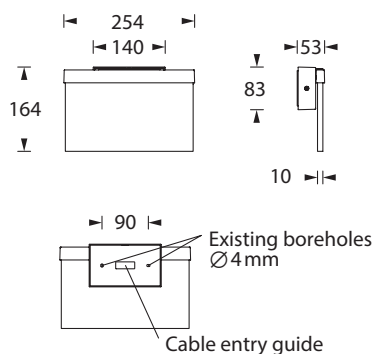

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux	15%-50% / 100% emergency / mains
NiMH battery	4,8V 0,8Ah	Temperature range DS -5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE407412-SL	LINE ALU200 UM EB-SL LED	1W LED-bar	130lm	4,5VA	1h
LE407412-SWX	LINE ALU200 UM EB-SWX LED	1W LED-bar	130lm	5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005