



# LINE ALU300 RM


Elegant and modern design, made of aluminum in white or black, special colors possible.

The luminaire is suitable for recessed ceiling mounting. With the optional wall bracket the luminaire can also be used for recessed wall mounting in cavity walls. Convenient installation due to circular cutout. Installation box and container are included in the scope of delivery. With the two accessory sets, central pendulum and wire mounting, the luminaire is very changeable and versatile.

The 10 mm light-deflecting pane is illuminated with a 1,5 watt LED-bar. A pictogram set with arrow left / right / down / blind is already enclosed.

## Technical specifications

|                       |                                                                                          |
|-----------------------|------------------------------------------------------------------------------------------|
| Visibility distance   | 30m                                                                                      |
| Connecting terminals  | 2 x 2,5 mm <sup>2</sup> for double assignment                                            |
| Casing/colour         | Aluminum die-cast / white or black                                                       |
| Type of assembly      | Recessed ceiling mounting, with wall bracket also recessed wall mounting in cavity walls |
| Dimensions            |                                                                                          |
| Luminaire (W x H x D) | 329 x 204 x 78 mm                                                                        |
| Container (W x H x D) | 315 x 73 x 30 mm                                                                         |
| Protection class      | IP40                                                                                     |
| Safety class          | II                                                                                       |

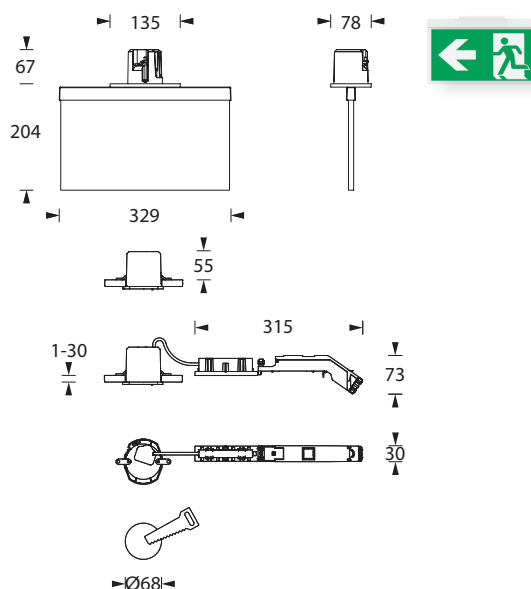

Attention: Minimum installation depth 130mm

## Self contained luminaires

### Technical specifications

|                |              |                                    |               |                                  |
|----------------|--------------|------------------------------------|---------------|----------------------------------|
| Voltage supply | 230V 50/60Hz | Temperature range BS 0°C to +35°C  | Luminous flux | 15%-50% / 100% emergency / mains |
| NiMH battery   | 4,8V 0,8Ah   | Temperature range DS -5°C to +30°C |               |                                  |

### Order information

| Item number  | Description               | Illuminant   | Light current mains operation | Power consumption | Rated operating time |
|--------------|---------------------------|--------------|-------------------------------|-------------------|----------------------|
| LE407424-SL  | LINE ALU300 RM EB-SL LED  | 1,5W LED-bar | 190lm                         | 5VA               | 1h                   |
| LE407424-SWX | LINE ALU300 RM EB-SWX LED | 1,5W LED-bar | 190lm                         | 5,5VA             | 1h                   |

### Self contained luminaires

|    |                             |
|----|-----------------------------|
| SC | Self monitoring SELF CHECK  |
| SL | Bus control SAFELOG Line    |
| SW | Wireless monitoring SAFELOG |

### General

|   |                    |
|---|--------------------|
| F | Wide area optic    |
| R | Escape route optic |
| T | Downlight optic    |

### Our standard casing colours

|       |          |
|-------|----------|
| White | RAL 9016 |
| Black | RAL 9005 |