



LINE ALU300 UM

Elegant and modern design, made of aluminum in white or black, special colors possible.



By simply remounting the container, the luminaire can be used universally for ceiling and wall mounting. A 90 degree parallel wall mounting is also possible, a corresponding pictogram set is optionally available.

With the two accessory sets, central pendulum and wire mounting, the luminaire is very changeable and versatile.

The 10 mm light-deflecting pane is illuminated with a 1,5 watt LED-bar. A pictogram set with arrow left / right / down / blind is already enclosed.

Technical specifications

Visibility distance	30 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Aluminum die-cast / white or black
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling	329 x 233 x 83 mm
Wall	329 x 203 x 53 mm
Protection class	IP40
Safety class	II

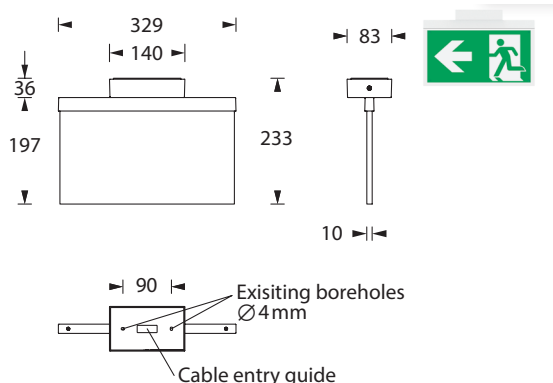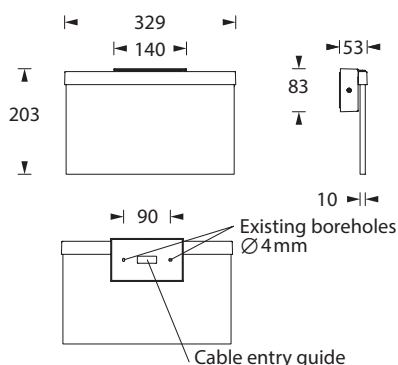

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux	15%-50% / 100% emergency / mains
NiMH battery	4,8V 0,8Ah	Temperature range DS -5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE407422-SL	LINE ALU300 UM EB-SL LED	1,5W LED-bar	190lm	5VA	1h
LE407422-SWX	LINE ALU300 UM EB-SWX LED	1,5W LED-bar	190lm	5,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005