

LINE 200 IP43 UM

Extremely lean polycarbonate housing in an appealing design for wall or ceiling mounting. Easy to handle locking mechanism without screws. Optionally: Recessed mounting with recessed ceiling frame.

The luminaire is equipped with a 2 Watt LED-bar.





Technical specifications

Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate / white (light cover clear)
Type of assembly	Ceiling or wall mounting
Dimensions (W x H x D)	265 x 69 x 37 mm
Protection class	IP43
Safety class	II



Wide Area Optic

Illuminant: 2W LED-bar

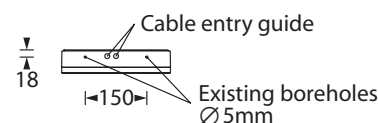

optional: Recessed ceiling frame

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS	0°C to +35°C	Luminous flux	15%-50% / 100% emergency / mains
NiMH battery	4,8V 0,8Ah	Temperature range DS	-5°C to +30°C		

Order information

Item number	Description	Illuminant	Light current mains operation	Power consumption	Rated operating time
LE405151-SL	LINE 200 IP43 UM EB-SL LED	2W LED-bar	240lm	5,5VA	1h
LE405151-SWX	LINE 200 IP43 UM EB-SWX LED	2W LED-bar	240lm	6VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005