

3W
LED

IP40

IP20

LLED^o
luxexit

QUASAR R80

Safety luminaire for recessed ceiling mounting, housing nearly flush with ceiling, made of white polycarbonate. Different supply containers available.


To reduce maintenance costs, the self-contained version has an easily accessible and tool-free exchangeable battery.

Available with optic for wide area illumination or escape route illumination. Opti-onal there is a rectangular cover frame available.

The safety luminaire is equipped with one 3W power LED (switching type: non-maintain mode).

Technical specifications


Connecting terminals	2 x 2,5 mm ² for double assignment Polycarbonate / white
Casing/colour	Recessed ceiling mounting
Type of assembly	
Dimensions	
Luminaire body	80 x 47 mm
D) Container (W x H x D)	200 x 52 x 41 mm / Self contained luminaire
Protection class	IP40
Luminaire body	IP20
Container Safety class	II

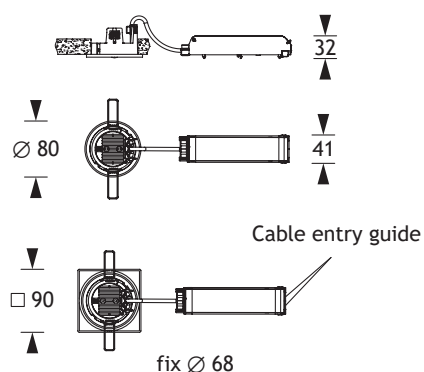


Attention: Minimum installation depth 100mm



Wide Area Optic

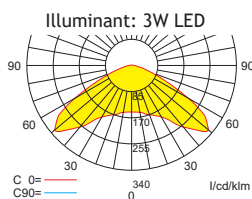

Escape Route Optic

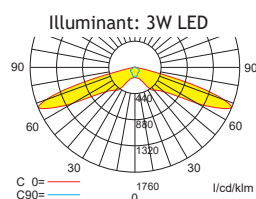

Order information

Item number	Description	Illuminant	Light current mains operation	Light current emergency	Power consumption	Rated operating time
LE405867-SL	QUASAR 80-PC ER-F EB-SL LED	3W LED	120lm	280lm	5VA	1h
LE405867-SWX	QUASAR 80-PC ER-F EB-SWX LED	3W LED	120lm	280lm	5,5VA	1h
LE405872-SL	QUASAR 80-PC ER-R EB-SL LED	3W LED	120lm	280lm	5VA	1h
LE405872-SWX	QUASAR 80-PC ER-R EB-SWX LED	3W LED	120lm	280lm	5,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

Whit	RAL 9016
Black	RAL 9005