



iLUX 200 BEL WM/DM

Appealing, modern IP54 safety luminaire for wide area illumination, made of white polycarbonate and clear cover. Easy to install due to screwless click system.



Available with a 2 Watt LED-bar.



Technical specifications

Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (light cover clear)
Type of assembly	Ceiling mounting and wall mounting
Dimensions (W x H x D)	243 x 139 x 54 mm
Protection class	IP54
Safety class	II

Wide Area Optic

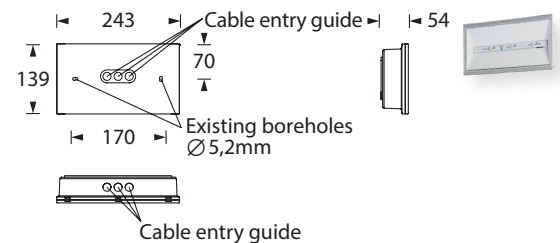

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz
NiMh battery	4,8V 2,0Ah
Luminous flux	100% / 100% emergency / mains

Temperature range BS 0°C to +35°C

Temperature range DS -5°C to +30°C

Order information

Item number	Description	Illuminant	Light current mains operation	Light current emergency	Power consumption	Rated operating time
LE406112-SL	iLUX 200 BEL DM/WM EB-SL LED	2W LED-bar	240lm	240lm	5,5VA	1h
LE406112-SWX	iLUX 200 BEL DM/WM EB-SWX LED	2W LED-bar	240lm	240lm	6VA	1h

Self contained luminaires	
SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General	
F	Wide area optic
R	Escape route optic
T	Downtlight optic

Our standard casing colours	
White	RAL 9016
Black	RAL 9005