



iLUX 200 DM

Appealing, modern IP54 exit sign luminaire made of white polycarbonate and clear cover for ceiling mounting.


Easy to install due to screwless click system. Pictogram-set included.

Equipped with 2 Watt LED-bar.



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (Light cover clear)
Type of assembly	Ceiling mounting
Dimensions (W x H x D)	243 x 149 x 62 mm
Protection class	IP54
Safety class	II

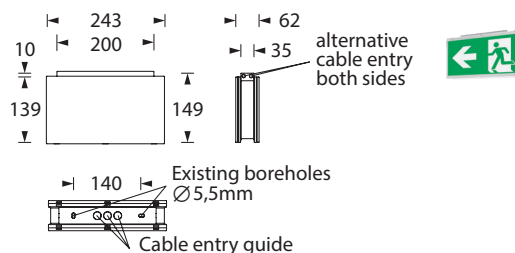

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz
NiMh battery	4,8V 0,8Ah

Temperature range BS	0°C to +35°C
Temperature range DS	-5°C to +30°C

Luminous flux	15%-50% / 100% emergency/mains
---------------	--------------------------------

Order information

Standard version		Illuminant	Light current mains operation	Power consumption	Rated operating time
Item number	Description				
LE406107-SL	iLUX 200 DM EB-SL LED	2W LED-bar	240lm	5,5VA	1h
LE406107-SWX	iLUX 200 DM EB-SWX LED	2W LED-bar	240lm	6VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005