



iLUX DUO 300 WM

Combined exit sign and safety luminaire made of polycarbonate with clear cover, easy mounting due to click system.

Exit sign luminaire with single sided pictogram and additional wide area and es-cape route illumination for wall mounting. Optic for wide area illumination alrea-dy mounted also enclosed is the optic for escape route.


The luminaire is equipped with a 1,5 watt LED bar and a 3 watt power LED.

Even though the luminaire combines two different types of luminaires, it is coun-tered as one single luminaire within an electric circuit.



Technical specifications

Visibility distance	30 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate / white (light cover clear)
Type of assembly	Wall mounting
Dimensions (W x H x D)	313 x 176 x 54 mm
Protection class	IP43
Safety class	II

Wide Area Optic



Escape Route Optic

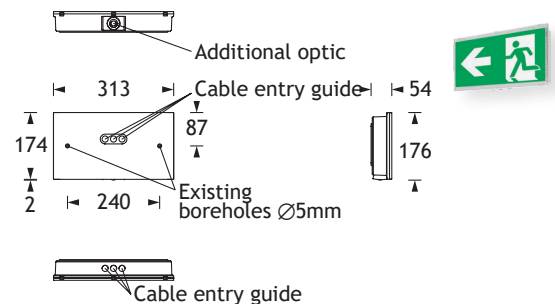

Self contained luminaires

Technical specifications

Voltage supply	230V 50/60Hz	Temperature range BS 0°C to +35°C	Luminous flux exit sign	15%-50% / 100% emergency / mains
NiMh battery	4,8V 0,8Ah (1h) / 4,8V 2,0Ah (3h)	Temperature range DS -5°C to +30°C	Luminous flux safety module	100% / 0% emergency / mains

Order information

Item number	Description	Illuminant Exit sign	Light current mains operation	Light current emergency	Power consumption	Rated operating time
LE404971-SL	iLUX 300 DUO WM EB-SL LED	1,5W LED-bar + 3W LED	190lm	190lm	10VA	1h
LE404971-SWX	iLUX 300 DUO WM EB-SWX LED	1,5W LED-bar + 3W LED	190lm	190lm	10,5VA	1h

Self contained luminaires

SC	Self monitoring SELF CHECK
SL	Bus control SAFELOG Line
SW	Wireless monitoring SAFELOG

General

F	Wide area optic
R	Escape route optic
T	Downlight optic

Our standard casing colours

White	RAL 9016
Black	RAL 9005
Graphite grey	RAL 7024